



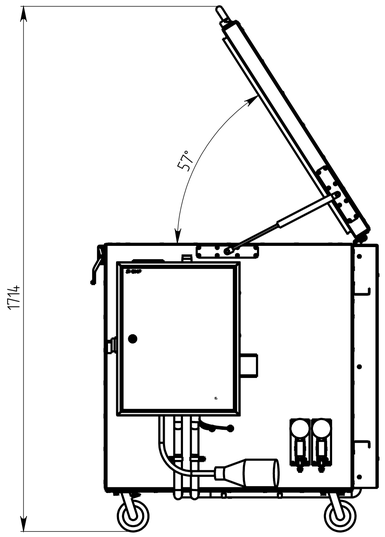


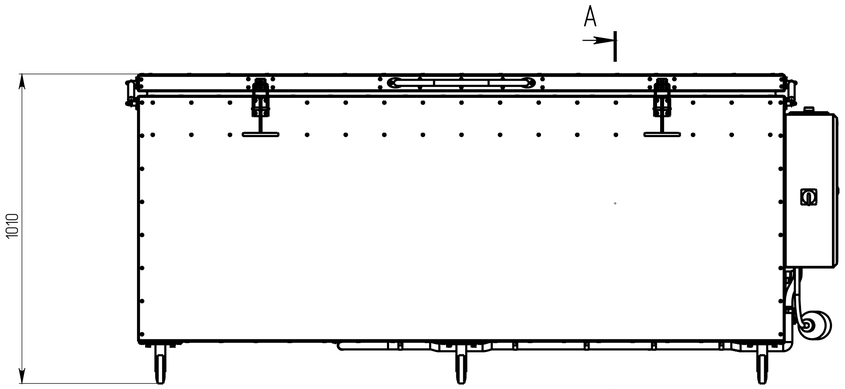


A-A

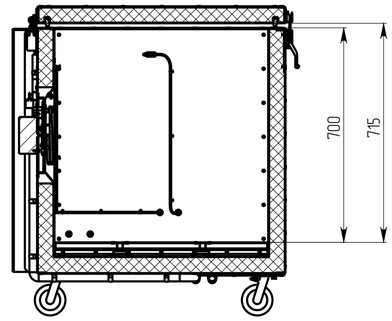

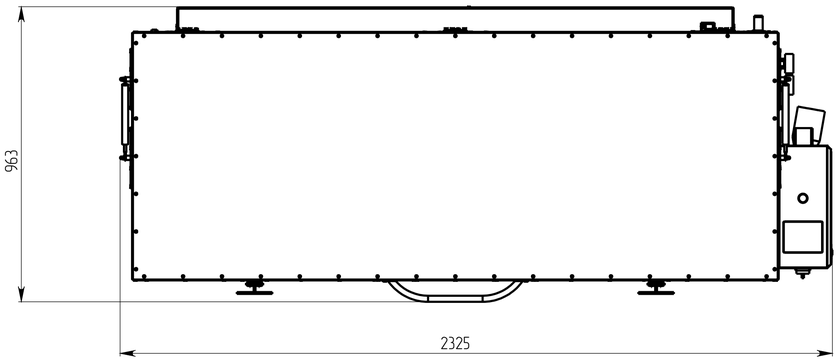

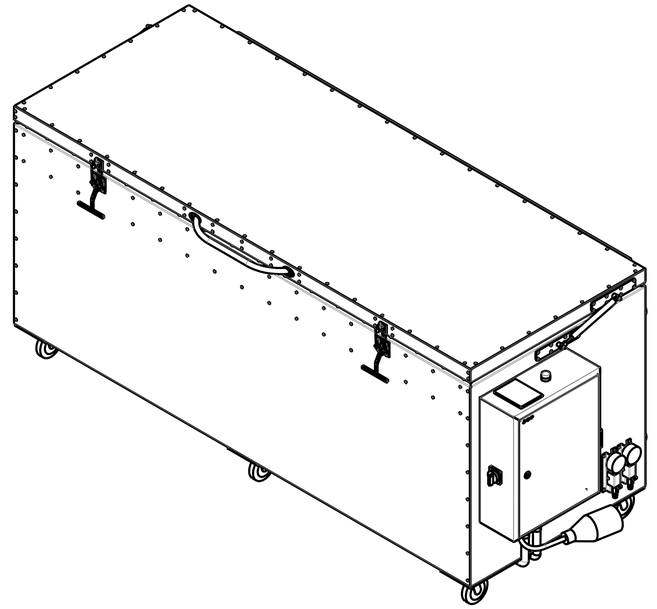

Internal dimensions

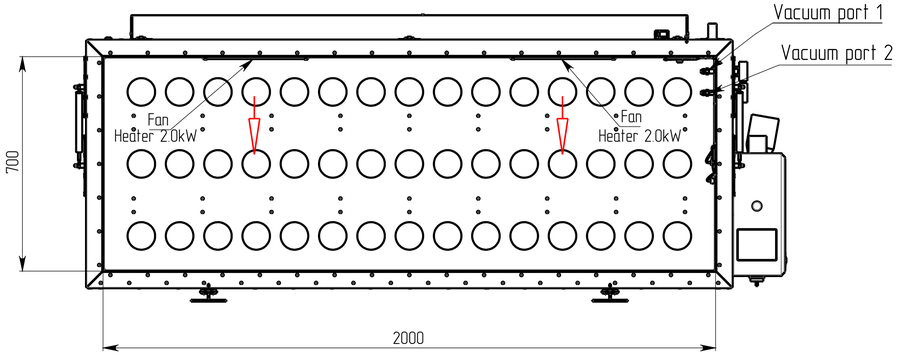

Mains supply voltage - 380V
Power supply frequency - 50Hz
Operation temperature - +15°C...200°C
Maximum power consumption - 4.4kW

This drawing and any information or descriptive material set out on it are the confidential and copyright property of **UAVOS ©** and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of **UAVOS.**

NEXT ASSY | USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED
DIM ARE IN MILLIMETERS
[DIM ARE IN INCHES]
TOL ON ANGLES **±0.5°**
0 PLACE **±0.5** 1 PLACE **±0.1**
INTERPRET DIM AND TOL
PER **ASME Y14.5M**
Surface Finish: **Ra3.2**

THIRD ANGLE PROJECTION

DRAFTER
CHECKER
DEV ENGR
CONTRACT NO.
MATERIAL

UAVOS

TITLE
Composite Curing Oven

SIZE **A1** | CAGE CODE | DRAWING NUMBER **OVEN-700-2000** | REV

SCALE | WEIGHT KG 275 | SHEET 1